


The LabelMill LM1012TTS semi-automatic table-top label applicator features fast, easy changeover to meet a variety of labeling needs. Using the unique rail-mounted modules, the LM1012TTS can serve as a label dispenser, tamp label applicator, round product label applicator, and flag label applicator. Because this unit can do them all, there is no need for additional systems for each type of application. Change over from one module to another in five minutes or less. The LM1012TTS is built for heavy-duty industrial use. The integrated operator interface makes change over and control adjustments quick and easy!



STANDARD SYSTEM FEATURES

- Modular System Design
- Integrated User Interface
- Tamp Applicator Module
- Flag Applicator Module
- Round Product Applicator Module
- User-Friendly Operating Software
- Batch Counter & Total Counter
- Customized Product Fixtures
- Precision X-Y Adjustment Tables
- Expanded System Widths
- Loose-Loop Interface for Thermal Desktop & Color Inkjet Printers

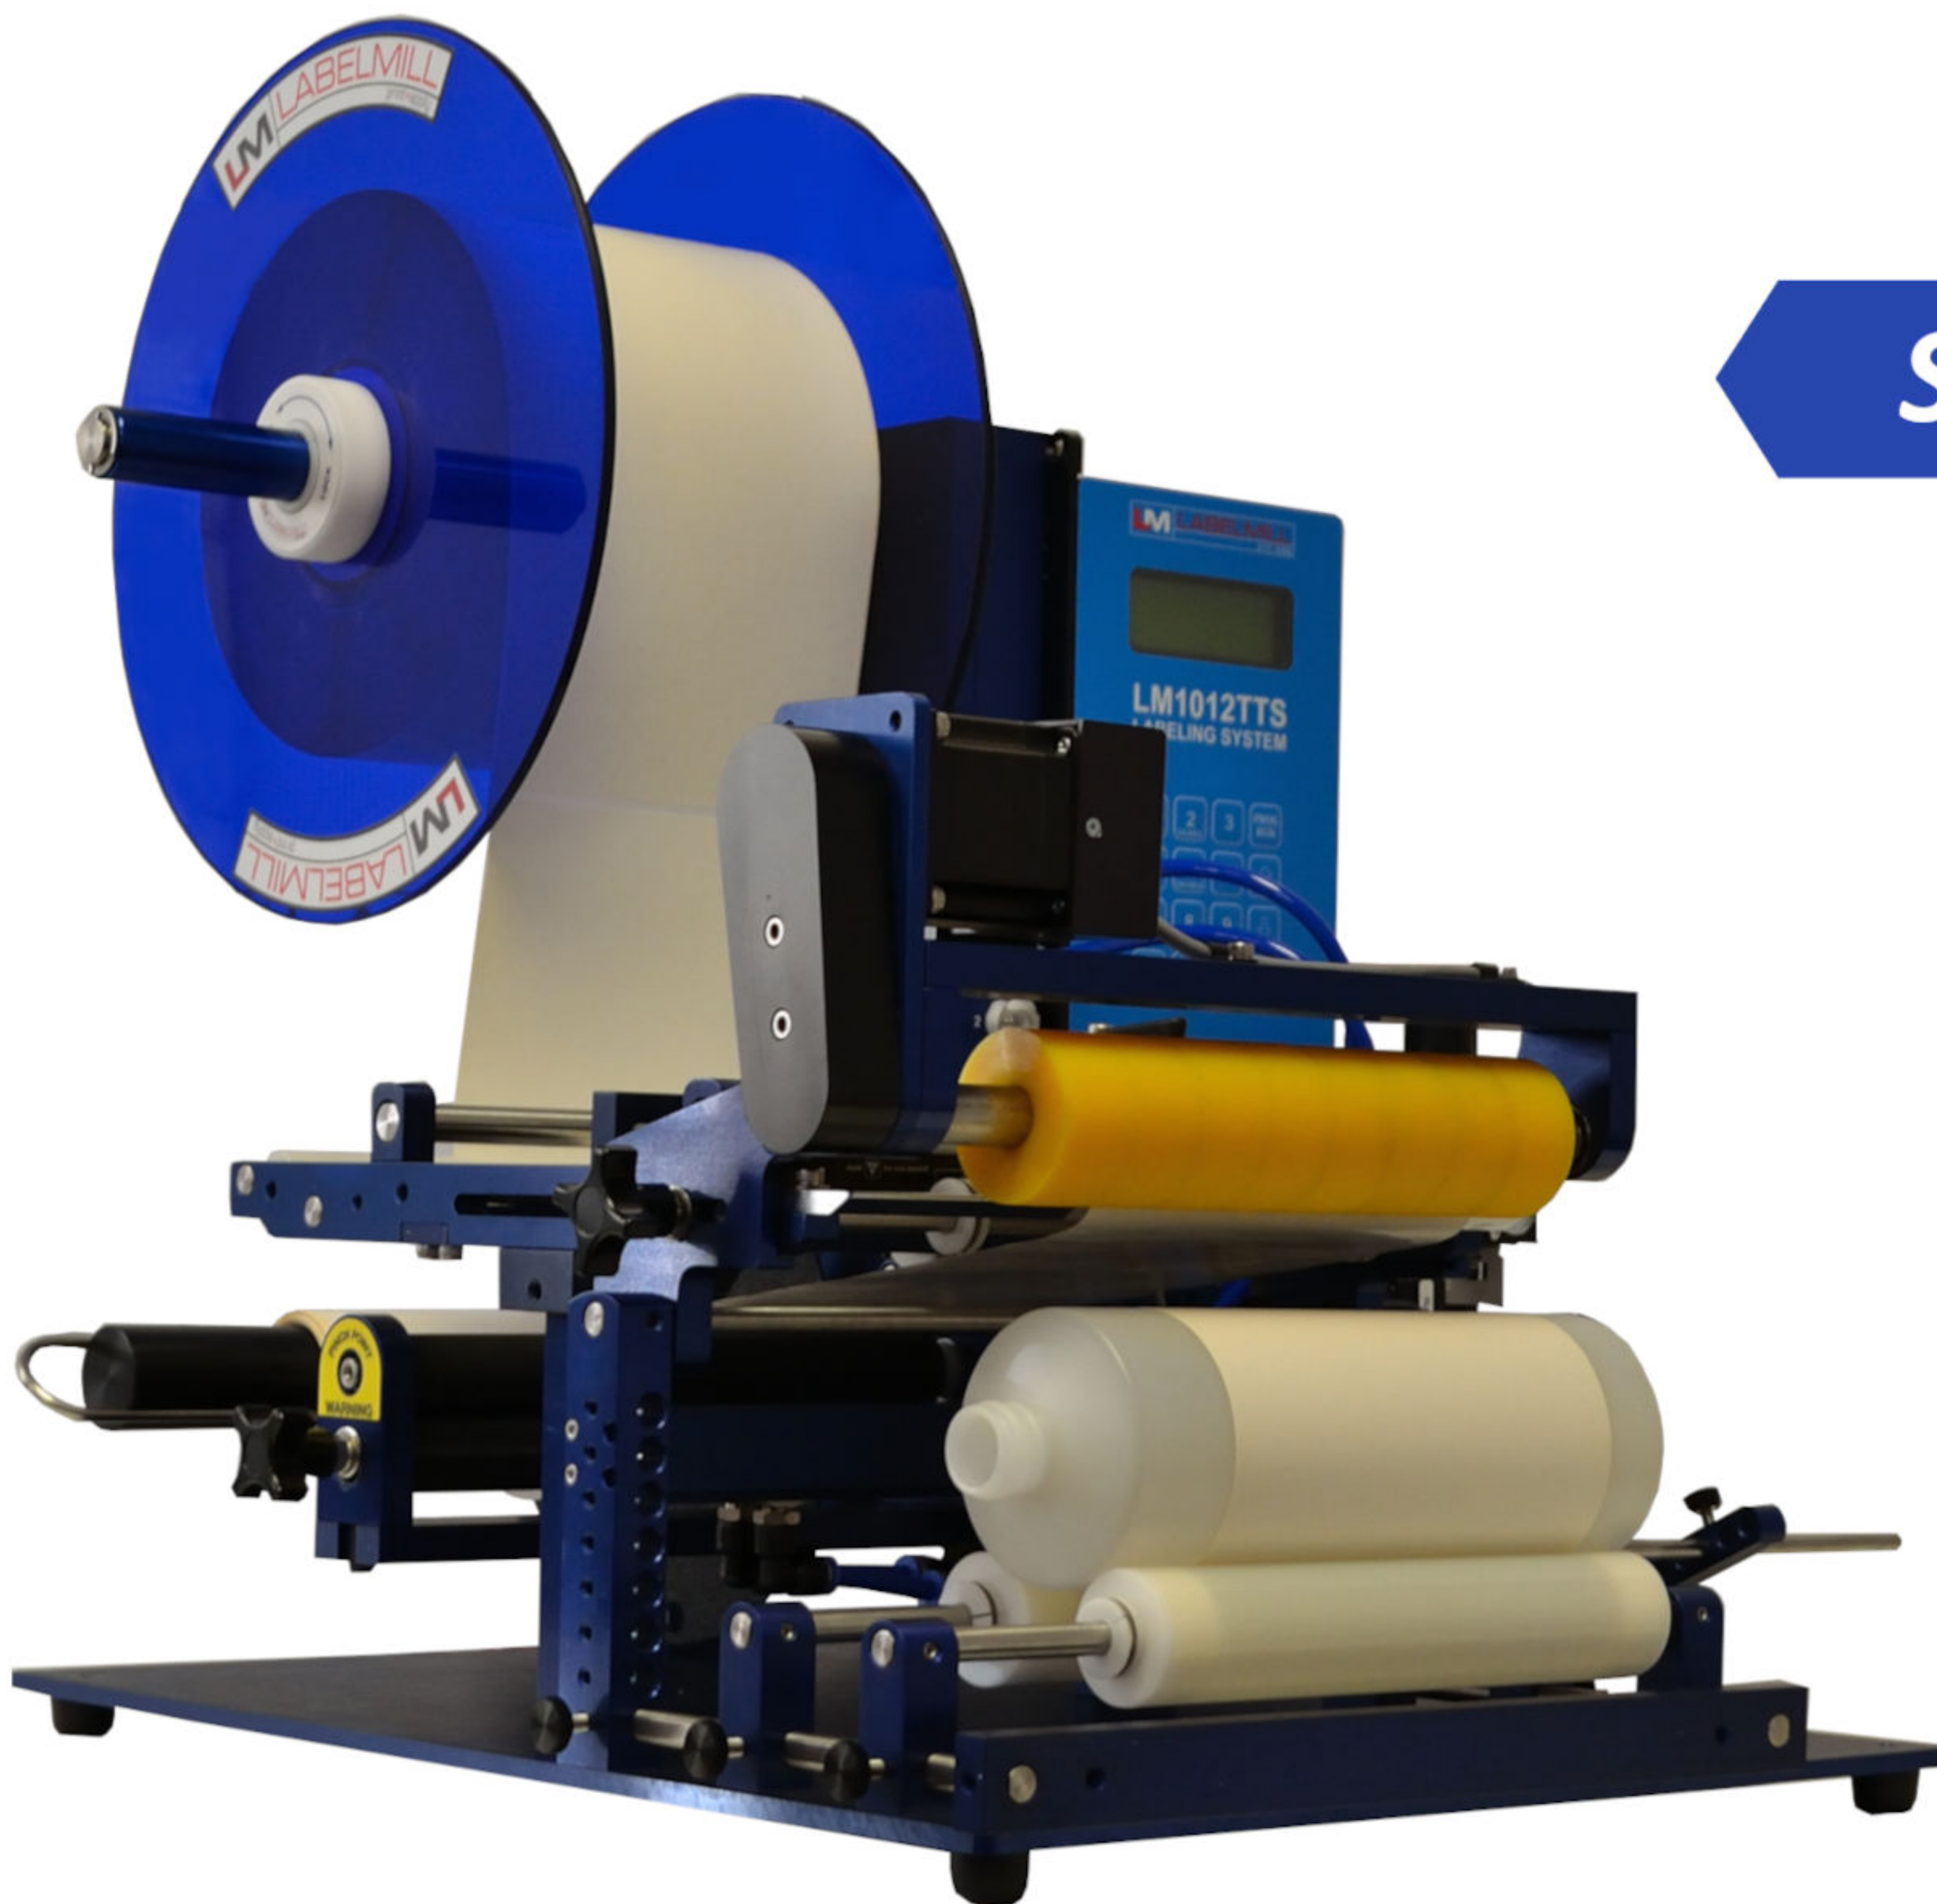

LabelMill
2416 Jackson St.
Savanna, IL 61074
800-273-4707

www.labelmill.com
info@labelmill.com



STANDARD APPLICATOR SPECIFICATIONS

Labeling Speed / Throughput Rate

10-30 / Minute, Product & Label Size Dependent

Label Placement Tolerance

Up to +/- 1/32" When Labels Are Produced to Specifications & Product Handling is Controlled

Electrical Input

100-240VAC / 60hz -- 5 Amps

Air Requirements

80psi / 3cfm Required

Environment

Operating 50-95 Degrees F (10-35 Degrees C)
15-85% Relative Humidity, Non-Condensing

Interface Sensors

Photoelectric Label Sensor
Programmable Stop Delay
Product Sensor - Photoeye / PLC Input
Programmable On Delay
Auxiliary Outputs with Connector
Push Button or Foot Switch Activation

Label Roll Capacity

12" Max Outside Diameter, Wound on a 3" Core, Die-Cut, Waste Removed with Minimum 1/8" Gap Separation Between Labels in the Running Direction

General Size / Standard Footprint

20" Wide x 26" Deep x 24" High

System Weight (6.5" System Width)

40 Lbs + Module Weight (Appox 5-7 lbs each)

Application Methods

Tamp, Round, Flag, Clamshell Flag

Product Range (Round Module)

Minimum: 0.25" OD
Maximum: 3.5" OD

Product Range (Gallon Round Module)

Minimum: 0.25" OD
Maximum: 6.5" OD

Standard Product Range (Tamp Module)

Minimum: 1.0" X 1.0"
Maximum: 8.0" X 8.0"

Acceptable Label Sizes

Minimum 0.5" Wide X 0.5" Long
Maximum 6.5" Wide X 20.0" Long
(Module Dependent, Optional Sizes Available)

Optional Features

Print & Apply Loose-Loop
Black & White Thermal Transfer
Full Color Inkjet Label Application
8.5" Wide Label Maximum
10.5" Wide Label Maximum
Clear (Capacitive) Electronic Label Sensor
Mechanical Label Sensors
Custom Product Fixtures
Precision X-Y Adjustment Table
Smart Tamp (Auto Retract)
Tapered Rollers (Round Module Carriage)
Custom Guarding / System Interlocks
Two-Hand Anti Tie-Down Input
Custom Configurations
Additional Options Available Upon Request



LabelMill

2416 Jackson St.

Savanna, IL 61074

800-273-4707

www.labelmill.com

info@labelmill.com

