



LABELMILL



print+apply

LM1005TTS

TABLE-TOP LABEL APPLICATOR

The LabelMill 1005TTS is a semi-automatic table top label applicator which features fast, easy changeover to meet a variety of labeling needs. Using the unique rail-mounted modules, the LabelMill 1005TTS can serve as a label dispenser, tamp applicator, round product applicator, and flag applicator. Because this unit can do them all, there is no need for additional units for each type of application. Change over from one application to another in five minutes or less. The LM1005TTS is built for heavy-duty industrial use. The hand-held interface makes change over and control adjustments quick and easy!

- Modular Design
- Label Dispenser
- Tamp Applicator
- Flag Applicator
- Round Product Applicator
- Auto-Round Module
- User-Friendly Operating Software
- Batch Counter
- Hand Held User Interface
- Optional System Status Light Tower
- Optional Smart Tamp
- Optional Width of 6.5" & 8.5"
- Optional Loose Loop Interface to Thermal Printer

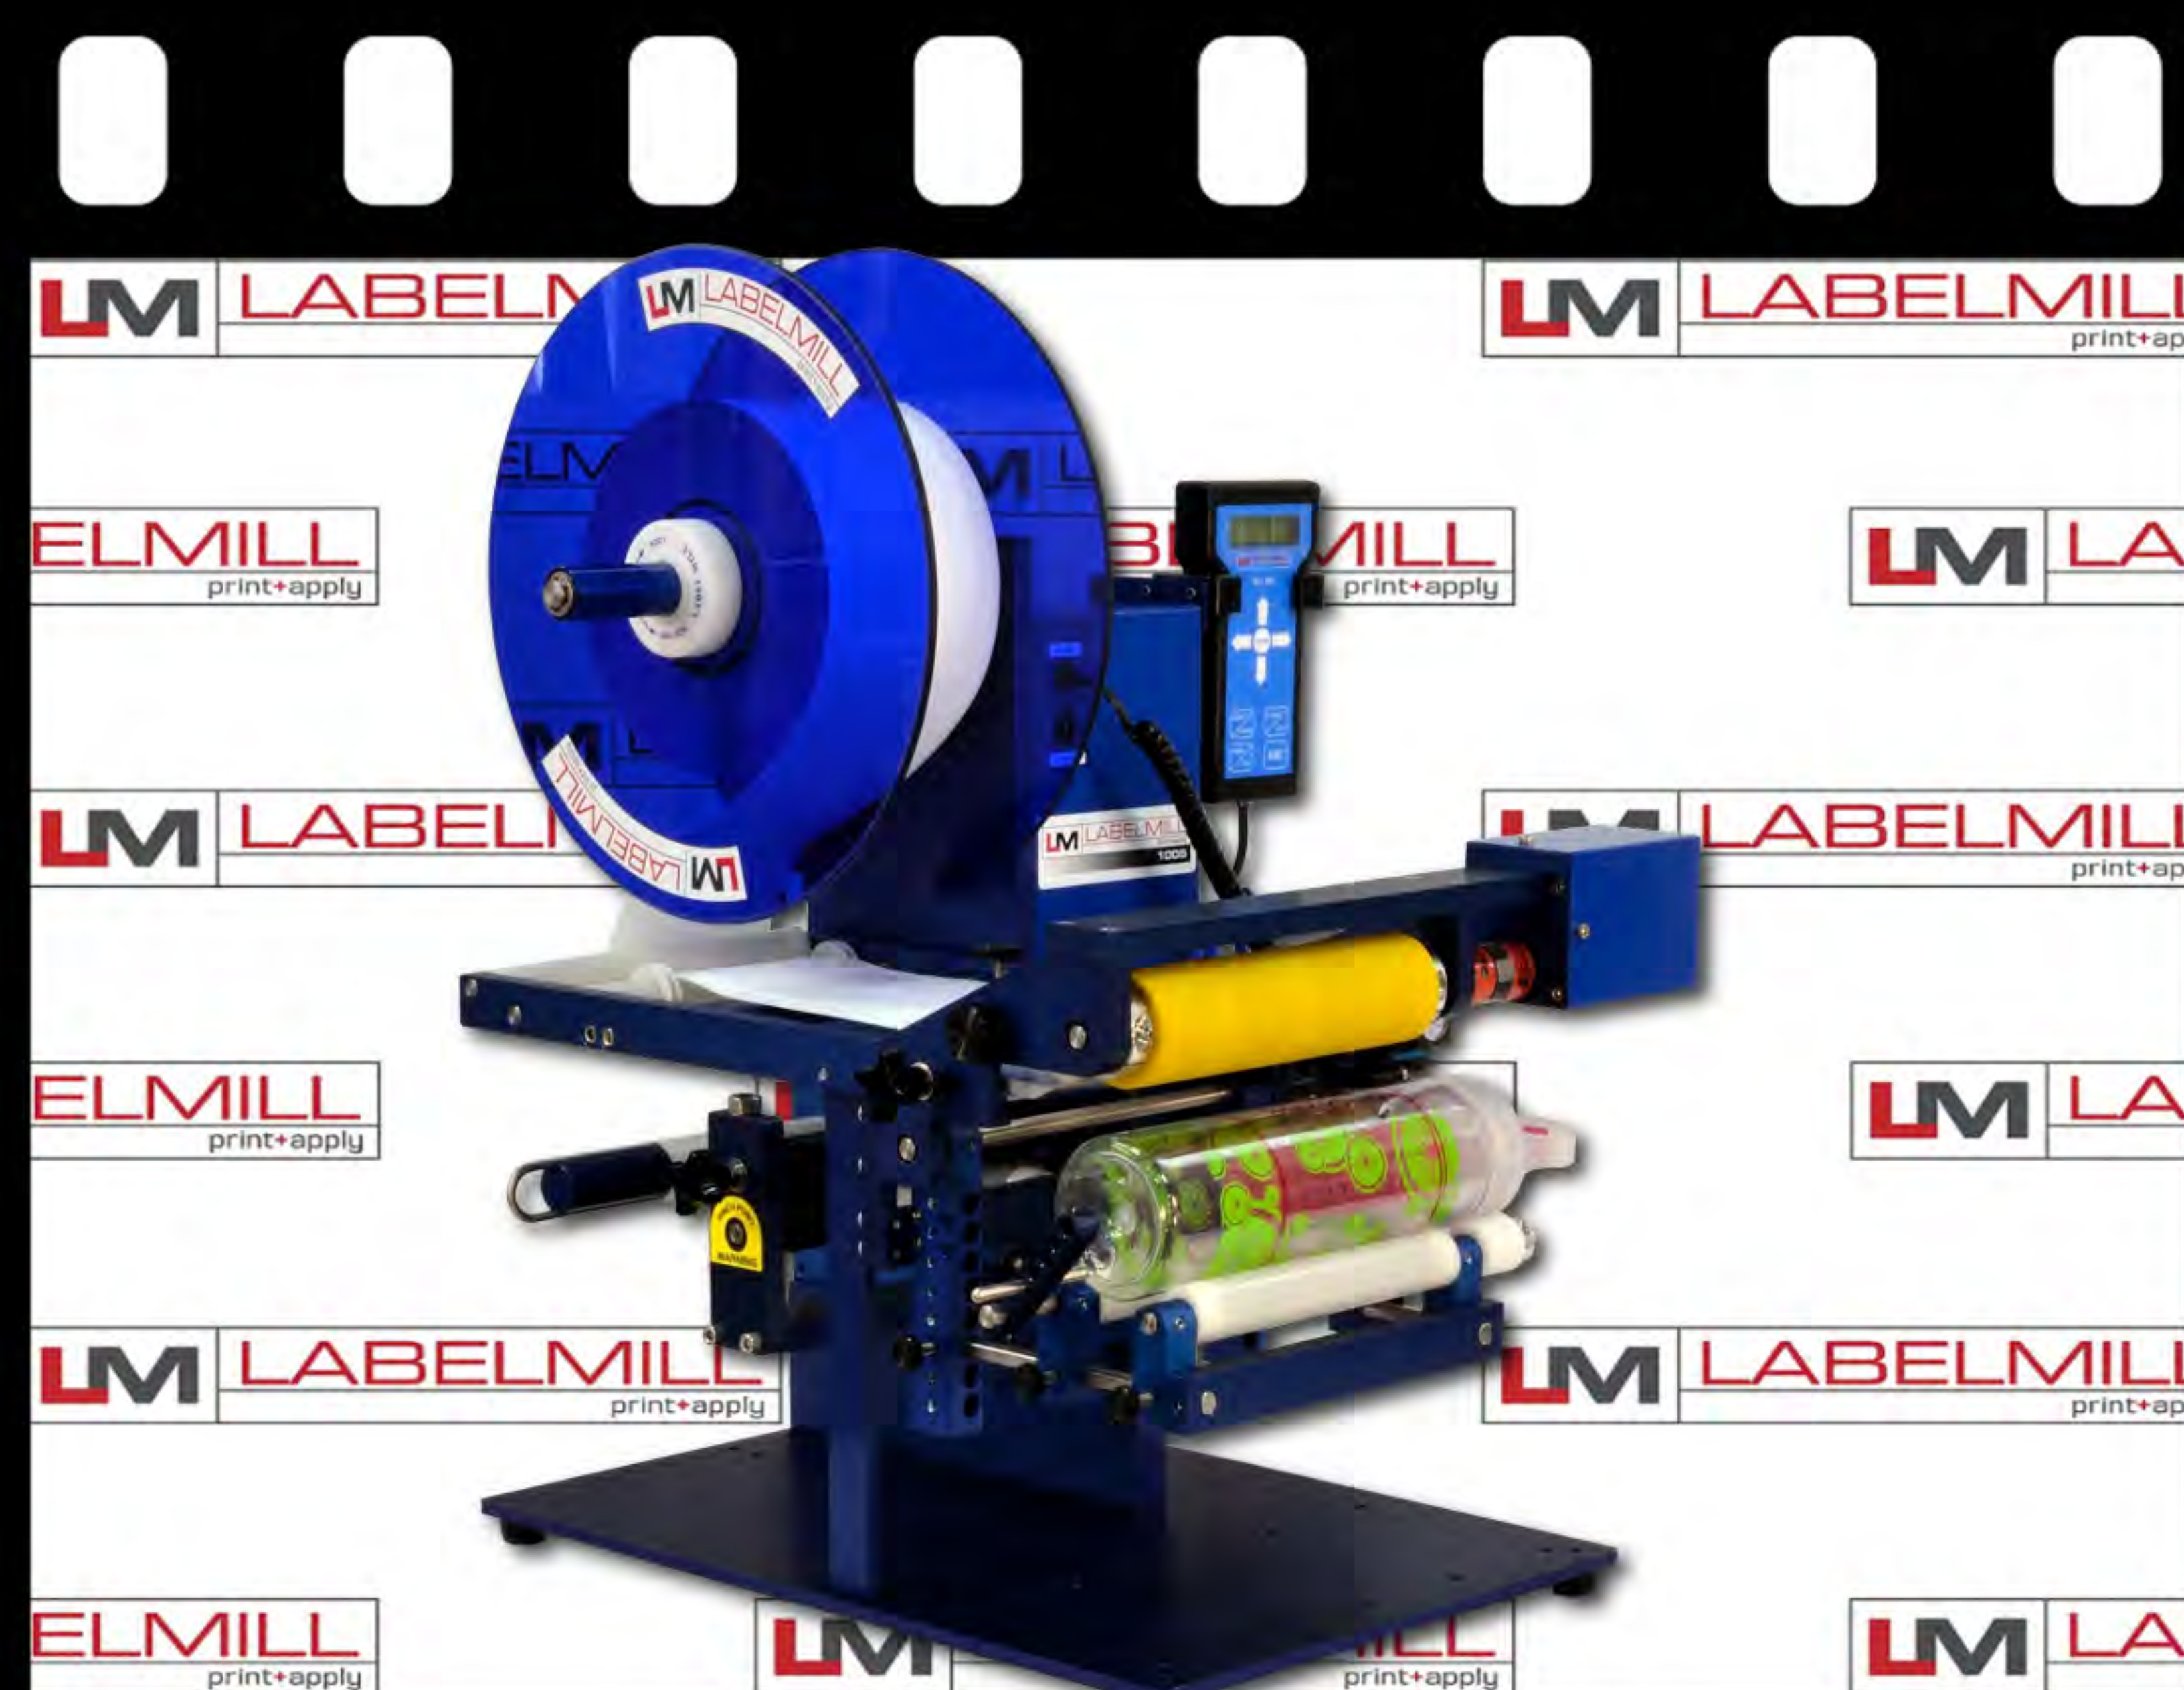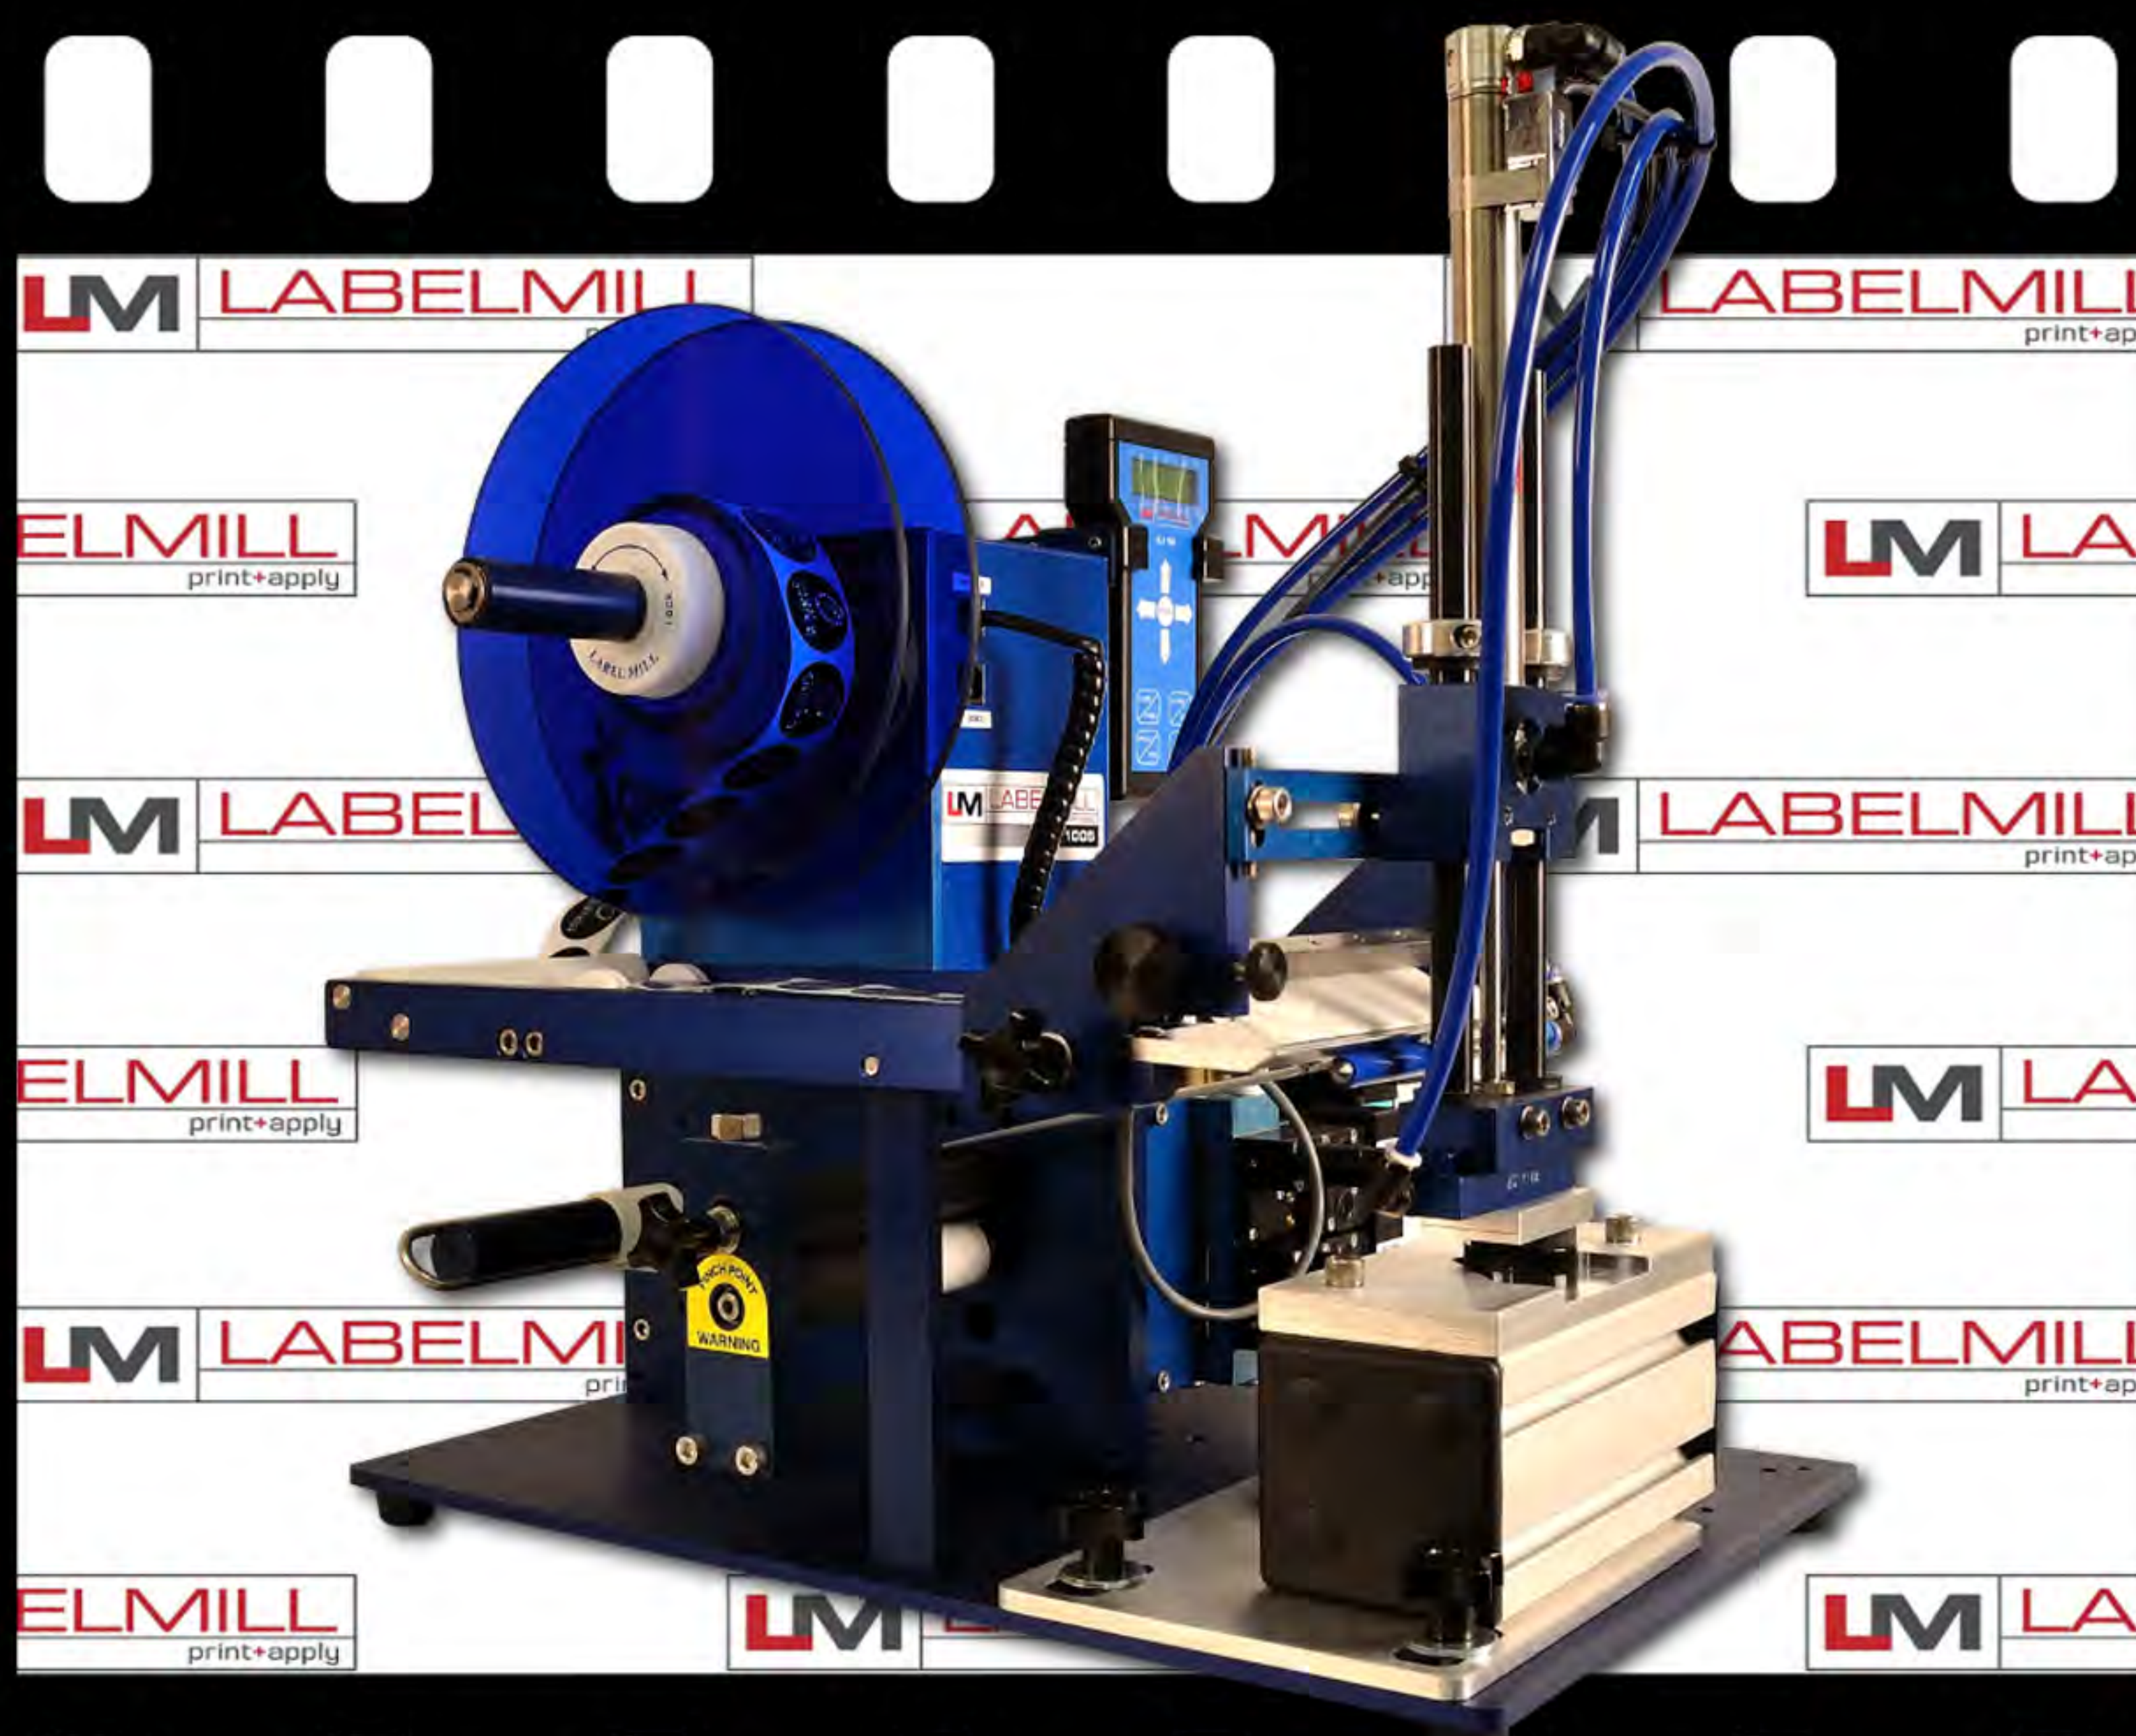

**MADE IN
U.S.A
PRODUCT**

LabelMill

2416 Jackson Street

Savanna, IL 61074

800-273-4707

www.labelmill.com

info@labelmill.com





LABELMILL

print+apply

LM1005TTS

TABLE-TOP LABEL APPLICATOR

STANDARD APPLICATOR SPECIFICATIONS

LABELING SPEED / THROUGHPUT RATE

UP TO 45 PER MINUTE

LABEL PLACEMENT TOLERANCE

UP TO +/- 1/32" WHEN LABELS ARE PRODUCED TO SPECIFICATIONS & PRODUCT HANDLING IS CONTROLLED

ELECTRICAL INPUT

110VAC / 60HZ -- 6 AMPS

LABEL ROLL CAPACITY

9" MAX OUTSIDE DIAMETER, WOUND ON A 3" CORE. DIE-CUT WASTE REMOVED WITH A MINIMUM 1/8" SEPARATION BETWEEN LABELS

AIR REQUIREMENTS

80 PSI / 3 CFM REQUIRED

ACCEPTABLE LABEL SIZES

MINIMUM 1/2" WIDE x 1/2" LONG
MAXIMUM 4-1/4" WIDE x 8" LONG

APPLICATION METHODS

TAMP, ROUND, FLAG, CLAMSHELL-FLAG & AUTOROUND

ENVIRONMENT

OPERATING 50-95 DEGREES F (10-35 DEGREES C)
15-85% RELATIVE HUMIDITY, NON-CONDENSING

FOOTPRINT

12" WIDE x 18" DEEP x 17" HIGH

WEIGHT

42 LBS. PLUS MODULE WEIGHT
(APPROXIMATELY 5-7 LBS. EACH)

OPTIONAL FEATURES


- 6-1/2" WIDE LABEL MAXIMUM
- 8-1/2" WIDE LABEL MAXIMUM
- 10.0" WIDE LABEL MAXIMUM
- 12.0" LABEL LENGTH UPGRADE
- TAPERED ROLLERS
- 12" OUTSIDE DIAMETER LABEL SUPPLY
- IMPRINTER
- CUSTOM PRODUCT FIXTURES
- PRINT & APPLY WHEN "LOOSE-LOOPED" WITH THERMAL PRINTER



-TAMP MODULE-



-FLAG MODULE-

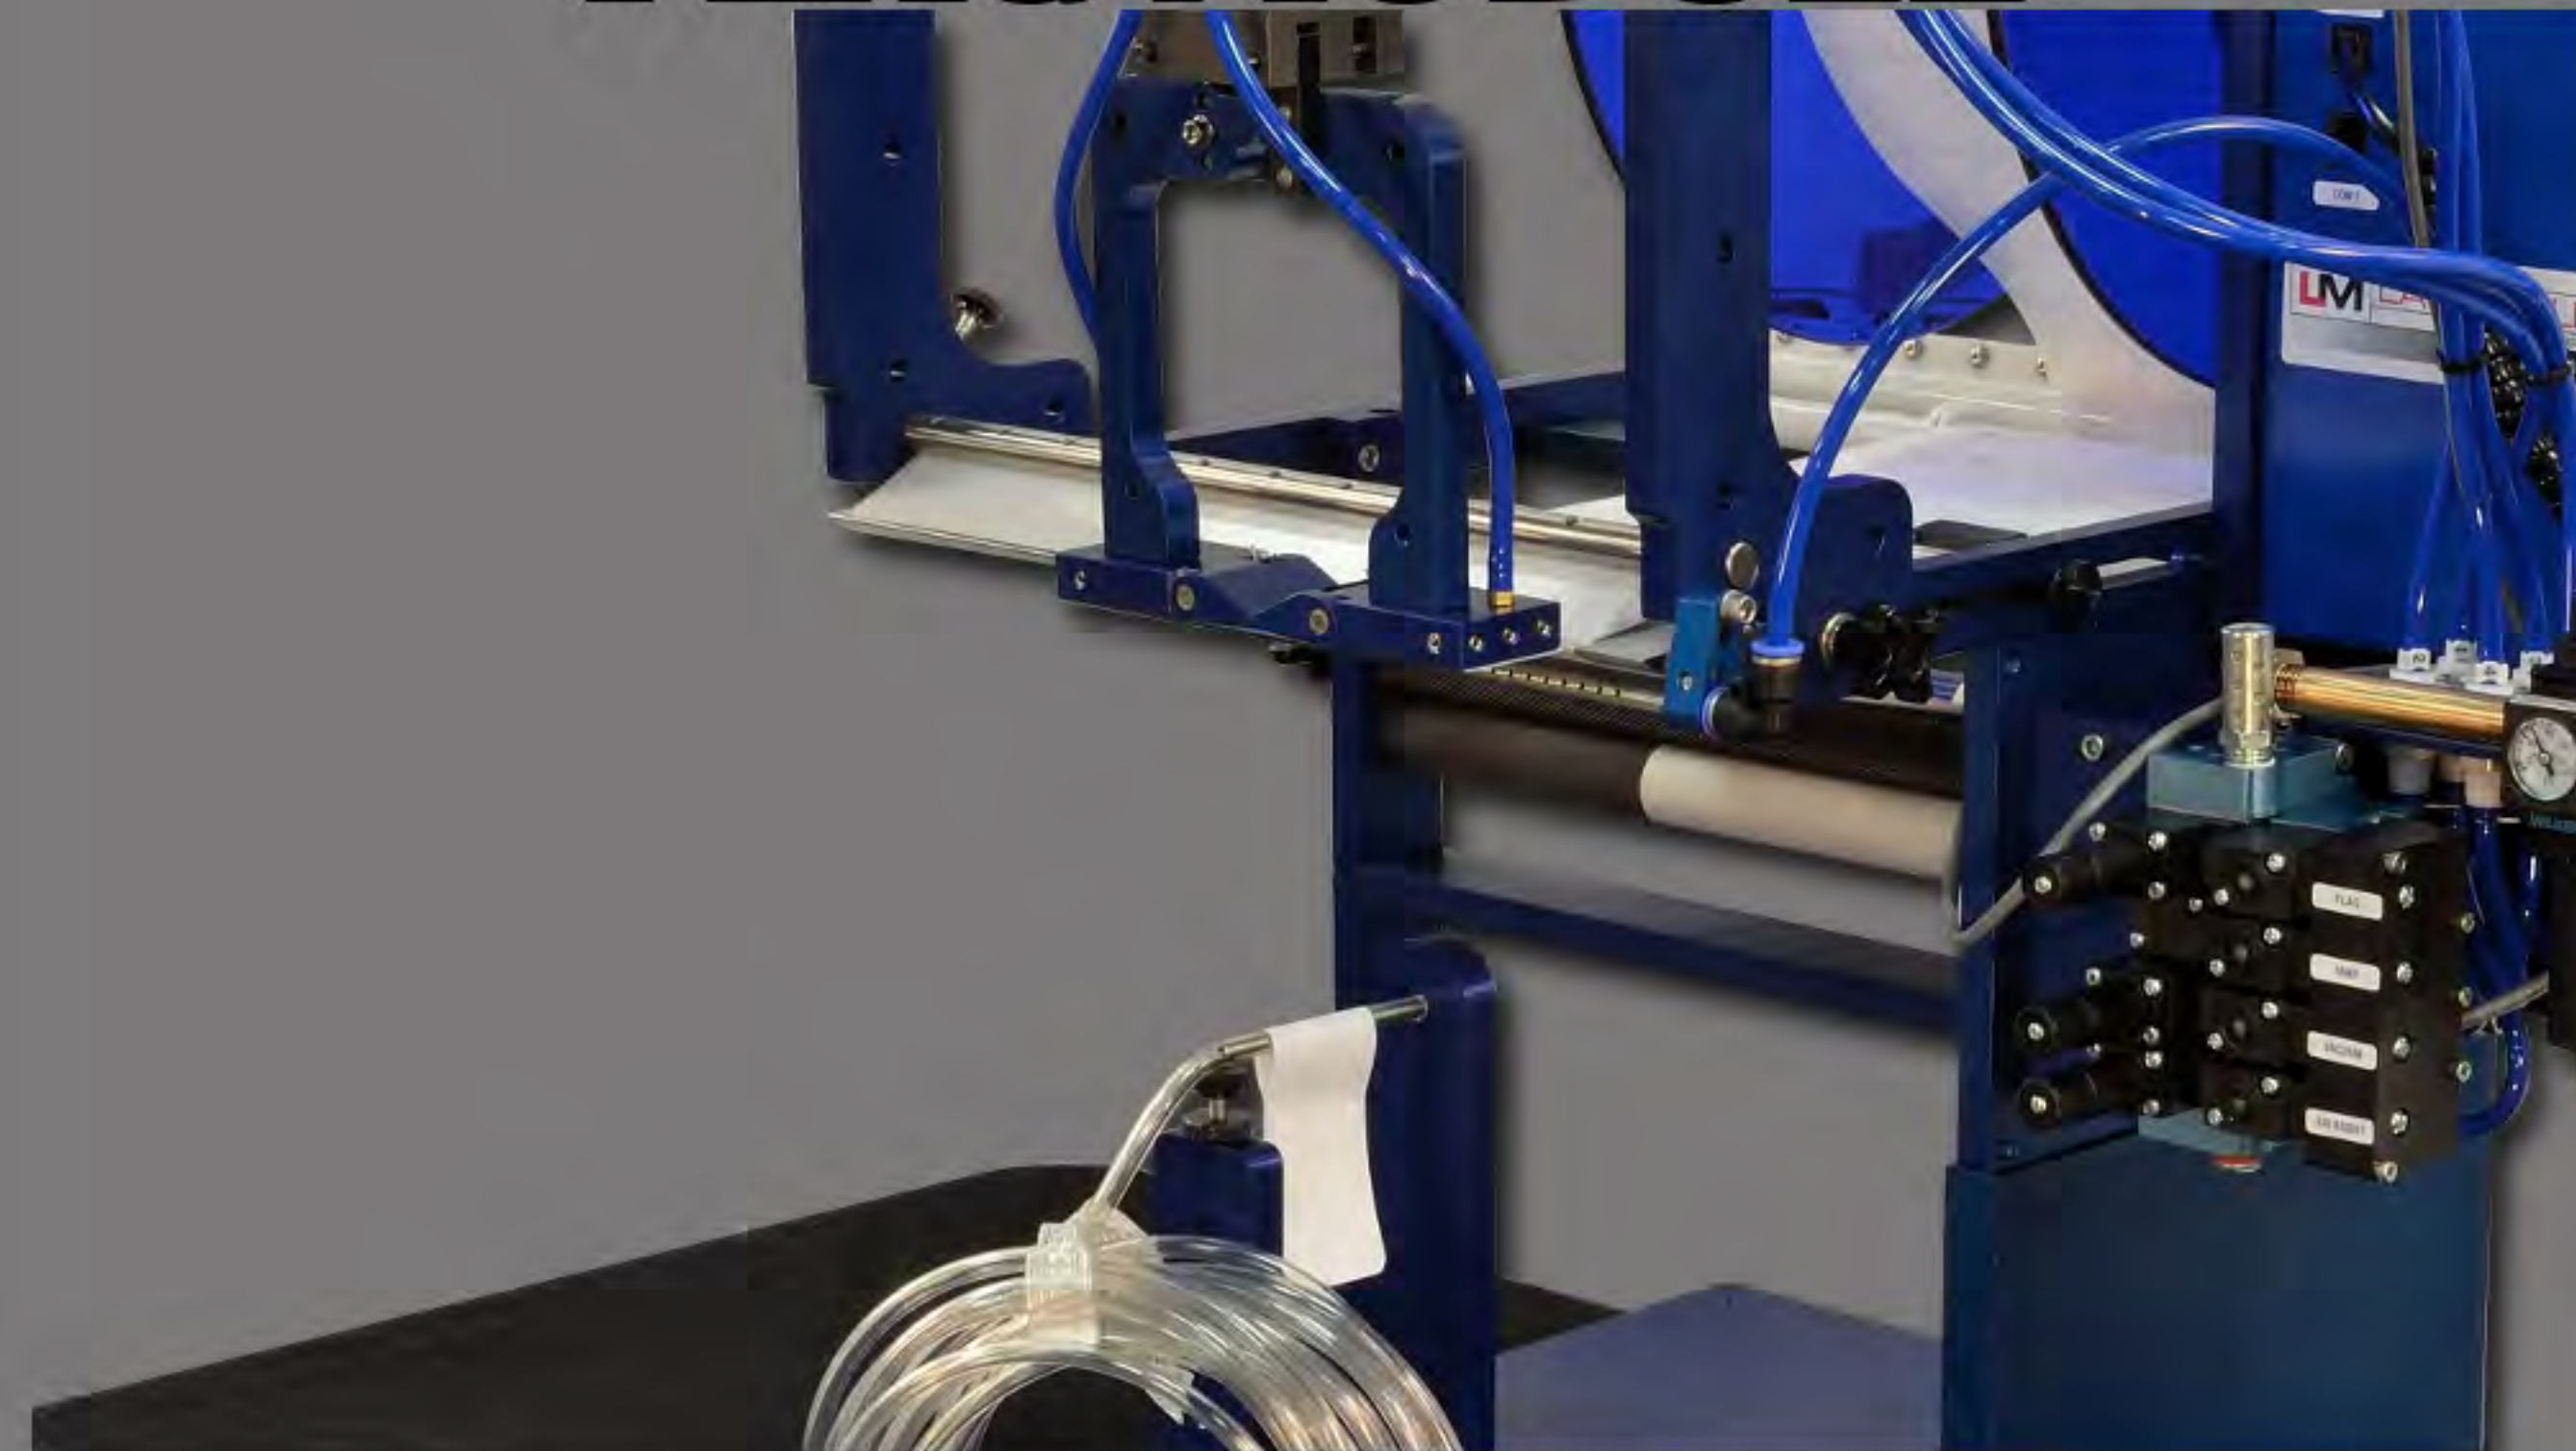

-ROUND MODULE-



-AUTO ROUND-



LabelMill

2416 Jackson Street

Savanna, IL 61074

800-273-4707

www.labelmill.com

This datasheet is for informational purposes only. MM2 makes no warranties, expressed or implied in this summary. Specifications are subject to change without notice. LabelMill is a registered trademark of Mills Machine II, Inc. © 2017 MM2. All rights reserved.